



**CLAIR**<sup>®</sup>  
Lighting Solutions

You Dream We Deliver



**Fix and Relax**

Web: [www.clairjg.com](http://www.clairjg.com)

Price List - Technical

wef. 1st Feb, 2023

**CLAIR**<sup>®</sup>  
Lighting Solutions



# INDEX



- **About Company & Certification .....1**
- **Credential & Esteemed Clients .....2-3**
- **Bulbs & Emergency Bulbs.....1**
- **Batten & Tube Lights .....2-3**
- **Downlights .....4-8**
- **Surface Lights .....9-10**
- **COB Downlights .....11-14**
- **Track Lights .....15**
- **Flood & Canopy Lights .....16-17**
- **Street Lights .....18-19**
- **High Bay Lights .....20**
- **Linear Lights .....21**
- **Rope & Strip Lights & Drivers .....22-23**
- **Suspended & Surface Lights .....24-25**
- **Industrial & Outdoor Underground Lights .....26-31**
- **List of Clients & Branches .....32-33**

## About CLAIR

**CLAIR Electronics Pvt. Ltd.** is an associated company of J.G. Group established since 1909 and lighting division came into existence in year 2006 with state of art manufacturing unit of CFL lamps, CLAIR launched led lighting product in years 2012.

"**CLAIR Electronics Pvt. Ltd.**" is established with the main objective of manufacturing LED lighting products for indoor and outdoor Lighting applications. The project envisaged is setting up of a state-of-the-art full-fledged LED Lighting fixture manufacturing and assembly line, first of its kind in Noida with a capacity of 20 million Lighting products per annum.

We are playing leading role in this culture of LED Innovation. We strive to become the global provider of intelligent environment – friendly LED lighting solutions for professional and Consumer applications. The overall vision of the company is to provide high performance lighting solutions and significantly reduce our customers' carbon footprint and energy demand in a way that is economically compelling and adds to their cash flow.

Due to their long life and high efficiency LEDs requires less frequently recycling than conventional light sources. In addition, with the rapid advancement in performance of LEDs, they are five times more efficient than traditional incandescent or halogen bulbs, making them the most energy- efficient and cost-effective lighting option over the system life. LEDs don't contain mercury or other hazardous materials like compact fluorescent bulbs do, so they can be handled and disposed of safely.



Factory Building  
(100000sq ft Production Area)



Upcoming Factory in Tirupati,  
Andhra Pradesh



Quality Control & RD



SMT



Driver Line



Production Line

## Certification



## Clair

# Government Projects:

Successfully supplied and installed



**15000+**  
Canopy Light



**50000+**  
Street Light

**50000+**  
Flood Light



**25000+**  
Ceiling Light



**10000+**  
Flame Proof Light



**700000+**  
Tube Light



**10000+**  
High mast Light

## Esteemed clients



**MORE**

## BULB SERIES Handsome

- Long life : 25000 hours
- In-built surge protection of 4 kV
- Efficacy range lies between ( ≥100 and <110 ) lm/W as per BEE guidelines
- Saving upto 85 % energy in comparison with ordinary Incandescent



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLDB03W	03W	90-300Vac, 50Hz	>0.90	300lm	50pcs	₹ 135.00	● ● ○
CLDB05W	05W	90-300Vac, 50Hz	>0.90	500lm	50pcs	₹ 140.00	● ● ○
CLDB07W	07W	90-300Vac, 50Hz	>0.90	700lm	50pcs	₹ 145.00	● ● ○
CLDB09W	09W	90-300Vac, 50Hz	>0.90	900lm	50pcs	₹ 150.00	● ● ○
CLDB12W	12W	90-300Vac, 50Hz	>0.90	1200lm	50pcs	₹ 225.00	● ● ○
CLDB15W	15W	90-300Vac, 50Hz	>0.90	1500lm	30pcs	₹ 250.00	● ● ○
CLDB20W	20W	90-300Vac, 50Hz	>0.90	2000lm	20pcs	₹ 600.00	● ● ○
CLDB26W	26W	90-300Vac, 50Hz	>0.90	2600lm	20pcs	₹ 1100.00	● ● ○
CLDB30W	30W	90-300Vac, 50Hz	>0.90	3000lm	10pcs	₹ 1200.00	● ● ○
CLDB40W	40W	90-300Vac, 50Hz	>0.90	4000lm	10pcs	₹ 1400.00	● ● ○
CLDB50W	50W	90-300Vac, 50Hz	>0.90	5000lm	10pcs	₹ 1600.00	● ● ○

## Inverter

- Long life : 25000 hours
- In-built surge protection of 4 kV
- Efficacy range lies between ( ≥100 and <110 ) lm/W
- Up to 4hrs backup after fully charge
- Internal lithium ion battery need 4-5 hours in to charge for fit to last up to 4 hours on battery.
- Lithium ion battery will charge when light switch ON.
- In case battery completely Drained keep switch on for 2-3 hours to charge battery.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBIN09	09W	90-300Vac, 50Hz	>0.90	900lm	20pcs	₹ 850.00	● ● ○

## Sirius



SIRIUS Emergency Led Light (Lantern)

Model	Wattage	Battery	Recharger Time	Backup	Standard Packing	List Price (₹ Per Unit)	Colour Temperature
CLEMER06W	06W	4500Amh	6 to 8 hours	10-11 Hours	10pcs	₹ 3500.00	● ● ○

\*Re-Chargeable

## BATTON - TUBELIGHT SERIES

### T-5 Adventa



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90 - 300Vac
- Long life : 25000 hours

T-5 20W Housing weight 120gram virgin polycarbonate.



MODEL	WATTAGE	SERIES	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL05WT5F	05W	ADVENTA	>0.90	337x24x38	20pcs	₹ 290.00	● ● ○
CL10WT5F	10W		>0.90	595x24x38	20pcs	₹ 350.00	● ● ○
CL20WT5F	20W		>0.90	1180x24x38	20pcs	₹ 550.00	● ● ○
CLP24WT5	24W	PRIMA	>0.90	1180x24x38	20pcs	₹ 650.00	● ● ○
CLP30WT5	30W		>0.90	1180x24x38	20pcs	₹ 1600.00	● ● ○
CLP40WT5	40W		>0.90	1190x30x43	20pcs	₹ 1700.00	● ● ○
CL20WT5A1	20W	ADVENTA 1	>0.90	1100x24x38	20pcs	₹ 475.00	● ● ○
CL20WT5A1	20W		>0.90	1100x24x38	20pcs	₹ 485.00	● ● ○

# Available in Aluminium Housing on demand

### ZD Adventa - Elenta



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90 - 300Vac
- Long life : 25000 hours

\*Housing Aluminium diecast & Virgin Polycarbonate diffuser for best diffused light.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLB18WS	18W	90-300Vac, 50Hz	>0.90	594x70x25	20pcs	₹ 1300.00	● ● ○
CLB20WS	20W	90-300Vac, 50Hz	>0.90	594x70x25	20pcs	₹ 1450.00	● ● ○
CLB40WS	40W	90-300Vac, 50Hz	>0.90	1194x70x25	20pcs	₹ 2800.00	● ● ○

#ZD Elenta design is patented to Clair.

## T-8 Adventa

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



\*Housing Aluminium diecast & Virgin Polycarbonate diffuser for best diffused light.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLB18WF	18W	90-300Vac, 50Hz	>0.90	1210x31.5	20pcs	₹ 650.00	● ● ○
CLB22WF	22W	90-300Vac, 50Hz	>0.90	1210x.31.5	20pcs	₹ 870.00	● ● ○

## T-5 Adventa 2

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W (mm)	BEAM ANGLE	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL20WTA2	20W	90-300Vac, 50Hz	>0.90	1100x24x33	120°	20pcs	₹ 450.00	● ● ○

Up-Coming Light weight housing polycarbonate.

## Sago

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours
- Ip65



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	BEAM ANGLE	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLPC-PC40W	40W	120-300Vac, 50Hz	>0.90	120°	20pcs	₹ 6500.00	● ● ○




## DOWNLIGHT SERIES

### Irish

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours

\*Housing Aluminium diecast for long life.



MODEL	WATTAGE	DIMENSIONS Outer (mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLE03W	03W	∅83x25	Round	∅67mm	20pcs	₹ 300.00	● ● ○
CLE06W	06W	∅118x25		∅107mm	20pcs	₹ 460.00	● ● ○
CLE09W	09W	∅118x25		∅107mm	20pcs	₹ 650.00	● ● ○
CLE12W	12W	∅170x25		∅154mm	20pcs	₹ 680.00	● ● ○
CLE15W	15W	∅170x25		∅154mm	20pcs	₹ 950.00	● ● ○
CLE18W	18W	∅225x25		∅205mm	10pcs	₹ 1000.00	● ● ○

CLE03W	03W	85x85x25	Square	70x70mm	20pcs	₹ 300.00	● ● ○
CLE06W	06W	120x120x25		100x100mm	20pcs	₹ 460.00	● ● ○
CLE09W	09W	120x120x25		100x100mm	20pcs	₹ 650.00	● ● ○
CLE12W	12W	170x170x25		154x154mm	20pcs	₹ 680.00	● ● ○
CLE15W	15W	170x170x25		154x154mm	20pcs	₹ 950.00	● ● ○
CLE18W	18W	225x225x25		205x205mm	10pcs	₹ 1000.00	● ● ○

### Adventa

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours

\*Housing PC for durability.



MODEL	WATTAGE	DIMENSIONS Outer (mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLAD03W	03W	∅83x25	Round	∅67mm	50pcs	₹ 300.00	● ● ○
CLAD06W	06W	∅118x25		∅107mm	20pcs	₹ 390.00	● ● ○
CLAD12W	12W	∅170x25		∅154mm	20pcs	₹ 580.00	● ● ○
CLAD18W	18W	∅225x25		∅205mm	10pcs	₹ 820.00	● ● ○

CLAD03W	03W	85x85x25	Square	67x67mm	50pcs	₹ 300.00	● ● ○
CLAD06W	06W	118x118x25		107x107mm	20pcs	₹ 390.00	● ● ○
CLAD12W	12W	170x170x25		154x154mm	20pcs	₹ 580.00	● ● ○
CLAD18W	18W	225x225x25		205x205mm	10pcs	₹ 820.00	● ● ○

# Orion



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



MODEL	WATTAGE	DIMENSIONS Outer (mm)	Shape	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLBLD08W	08W	∅116x35	Round	∅100mm	20pcs	₹ 600.00	● ● ○
CLBLD15W	15W	∅167x35		∅148mm	20pcs	₹ 800.00	● ● ○
CLBLD20W	20W	∅220x35		∅205mm	12pcs	₹ 1290.00	● ● ○

CLBLD08W	08W	116x116x35	Square	100x100mm	20pcs	₹ 600.00	● ● ○
CLBLD15W	15W	167x167x35		148x148mm	20pcs	₹ 800.00	● ● ○
CLBLD20W	20W	220x220x35		205x205mm	12pcs	₹ 1290.00	● ● ○

\*Orion is PC Body Downlight Elegant look with 100 lumen per watt.

# Orion Add-on



- Orion can be fixed on ceiling surface after adding orion add-on ring
- Made of virgin PC, Unbreakable, Long lasting unfed over years

MODEL	DIMENSIONS Outer (mm)	Shape	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLAD08	∅118x35	Round	20pcs	₹ 100.00
CLAD15	∅170x35		20pcs	₹ 140.00
CLAD20	∅224x35		20pcs	₹ 180.00

CLAD08	118x118x35	Square	20pcs	₹ 100.00
CLAD15	170x170x35		20pcs	₹ 140.00
CLAD20	224x224x35		20pcs	₹ 180.00

## Svelate

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours




MODEL	WATTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLEC24W	24W (1x1)	>0.90	295x295x10.5	280x280	10pcs	₹ 2100.00	● ● ○
CLEC30W	30W (1x2)	>0.90	595x295x10.5	580x280	2pcs	₹ 3000.00	● ● ○
CLEC36W	36W (2x2)	>0.90	595x595x10.5	580x580	2pcs	₹ 4000.00	● ● ○
CLEC40W	40W (2x2)	>0.90	595x595x10.5	580x580	2pcs	₹ 4500.00	● ● ○
CLEC36W	36W (1x4)	>0.90	1195x295x10.5	1180x280	2pcs	₹ 4500.00	● ● ○
CLEC40W	40W (1x4)	>0.90	1195x295x10.5	1180x280	2pcs	₹ 4600.00	● ● ○

\*Svelate is sleek, elegant design best quality of LGP and Diffuser for control lumen & better distribution of light.

\*Svelate light to replace conventional 2X2 downlight.

## Svelate - Backlit

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours

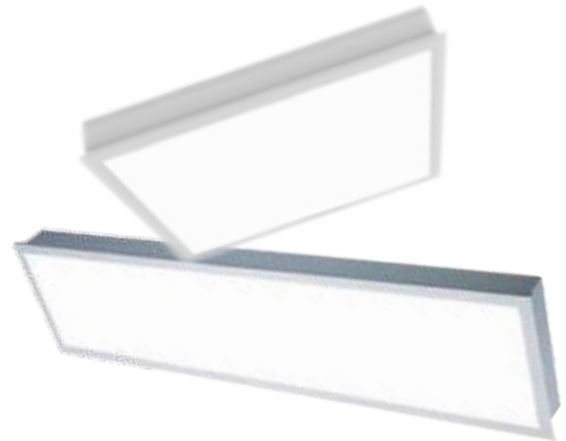

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSRT36W	36W (2x2)	90-300Vac, 50Hz	>0.90	595x595x61	2pcs	₹ 3800.00	● ● ○
CLSRT40W	40W (2x2)	90-300Vac, 50Hz	>0.90	595x595x61	2pcs	₹ 4000.00	● ● ○
CLSRT36W	36W (1x4)	90-300Vac, 50Hz	>0.90	1195x295x61	2pcs	₹ 4000.00	● ● ○
CLSRT40W	40W (1x4)	90-300Vac, 50Hz	>0.90	1195x295x61	2pcs	₹ 4000.00	● ● ○

\*Svelate (Backlite) is made CRC housing with polycarbonate diffuser to get maximum lumen per watt (100-130lm/w).

# Twinkle

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



MODEL	WATTAGE	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CSK03W	03W	Ø 80x83	Ø58mm	>0.90	50pcs	₹ 175.00	● ● ●
CSK03W	03W	Ø 80x83	Ø58mm	>0.90	50pcs	₹ 185.00	● ● ●
CLCE03W	03W	Ø 80x83	Ø58mm	>0.90	50pcs	₹ 270.00	● ● ●
CLCE03W	03W	Ø 80x83	Ø58mm	>0.90	50pcs	₹ 280.00	● ● ●
CLCE05W	05W	Ø 110X54	Ø78mm	>0.90	50pcs	₹ 200.00	● ● ●
CLCE05W	05W	Ø 110X54	Ø78mm	>0.90	50pcs	₹ 220.00	● ● ●
CLCE07W	07W	Ø 110X54	Ø78mm	>0.90	50pcs	₹ 260.00	● ● ●
CLCE07W	07W	Ø 110X54	Ø78mm	>0.90	50pcs	₹ 285.00	● ● ●
CLCE09W	09W	Ø 108X60	Ø78mm	>0.90	20pcs	₹ 360.00	● ● ●
CLCE09W	09W	Ø 108X60	Ø78mm	>0.90	20pcs	₹ 385.00	● ● ●

\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

# Twinkle Pro

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

MODEL	WATTAGE	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLPC03W	03W	Ø 70x40	Ø58mm	>0.90	50pcs	₹ 260.00	● ● ●
CLPC06W	06W	Ø 95x47	Ø70mm	>0.90	20pcs	₹ 520.00	● ● ●
CLPC08W	08W	Ø 106x48	Ø80mm	>0.90	20pcs	₹ 620.00	● ● ●
CLPC12W	12W	Ø 140x57	Ø116mm	>0.90	20pcs	₹ 1200.00	● ● ●

# Red, Green, Blue, Available On Order With Price Difference.

# Twinkle

- Environment-friendly as it does not contain Mercury.
- \*Al Body



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCEA12W	12W	90-300Vac, 50Hz	>0.90	∅ 111x45	∅ 75mm	20pcs	₹ 350.00	● ● ○
CLCEA15W	15W	90-300Vac, 50Hz	>0.90	∅ 111x45	∅ 75mm	20pcs	₹ 450.00	● ● ○

# Lyra

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting unfade Colour.

MODEL	WATTAGE	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLECO6W	06W	∅85X64	∅48mm	>0.90	50pcs	₹ 280.00	● ● ○
CLECO6W	06W	∅85X64	∅48mm	>0.90	50pcs	₹ 300.00	● ● ●
CLEC15W	15W	∅141X57	∅83mm	>0.90	30pcs	₹ 650.00	● ● ○
CLEC15W	15W	∅141X57	∅83mm	>0.90	30pcs	₹ 690.00	● ● ●

# Ginni - Button - Luna - Junction

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



MODEL	WATTAGE	TYPE	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLUM2W	02W	Ginni	∅42x16	∅33mm	>0.90	50pcs	₹ 225.00	● ● ○
CLTW03W	03W	Junction	∅80x37	∅44mm	>0.90	50pcs	₹ 180.00	● ● ○
CLTW03W	03W		∅80x37	∅44mm	>0.90	50pcs	₹ 190.00	● ● ●
CLGB2W	02W	Button	∅38x28	∅29mm	>0.90	50pcs	₹ 270.00	● ● ○
CLGL3W	03W	Luna	∅38x28	∅28mm	>0.90	50pcs	₹ 270.00	● ● ○

\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

## SURFACE MOUNTED SERIES

### Lepus

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours



\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLP06W	06W	90-300Vac, 50Hz	>0.90	Ø84x44	30pcs	₹ 390.00	● ● ●
CLLP06W	06W	90-300Vac, 50Hz	>0.90	Ø84x44	30pcs	₹ 410.00	● ● ●
CLLP12W	12W	90-300Vac, 50Hz	>0.90	Ø141x45	30pcs	₹ 590.00	● ● ●
CLLP12W	12W	90-300Vac, 50Hz	>0.90	Ø141x45	30pcs	₹ 610.00	● ● ●
CLLP15W	15W	90-300Vac, 50Hz	>0.90	Ø141x45	30pcs	₹ 690.00	● ● ●
CLLP15W	15W	90-300Vac, 50Hz	>0.90	Ø141x45	30pcs	₹ 710.00	● ● ●

### Lepus Star

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Light Fixtures can be changed without disturbing surface interior.
- Base remain same for all wattage (06W, 12W & 18W)



\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLPS06W	06W	90-300Vac, 50Hz	>0.90	Ø 85x85	20pcs	₹ 415.00	● ● ●
CLLPS12W	12W	90-300Vac, 50Hz	>0.90	Ø110x50	20pcs	₹ 610.00	● ● ●
CLLPS18W	18W	90-300Vac, 50Hz	>0.90	Ø136x54	20pcs	₹ 710.00	● ● ●

# Red, Green, Blue, Available on order with price difference.

### Lunar



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSLU06W	06W	120-300Vac, 50Hz	>0.90	Ø 92x28	20pcs	₹ 350.00	● ● ●
CLSLU12W	12W	120-300Vac, 50Hz	>0.90	Ø 121x28	20pcs	₹ 560.00	● ● ●
CLSLU18W	18W	120-300Vac, 50Hz	>0.90	Ø 156x28	20pcs	₹ 875.00	● ● ●
CLSLU22W	22W	120-300Vac, 50Hz	>0.90	Ø 190x28	20pcs	₹ 1275.00	● ● ●

# Estelle

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Glare Free



\*Housing Aluminium pressure diecast for long life.

MODEL	WATTAGE	Shape	VOLTAGE	POWER FACTOR	DIMENSIONS (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSRT06W	06W	Round ○	90-300Vac, 50Hz	>0.90	∅122x35	20pcs	₹ 520.00	● ● ○
CLSRT08W	08W		90-300Vac, 50Hz	>0.90	∅122x35	20pcs	₹ 700.00	● ● ○
CLSRT12W	12W		90-300Vac, 50Hz	>0.90	∅175x35	20pcs	₹ 830.00	● ● ○
CLSRT15W	15W		90-300Vac, 50Hz	>0.90	∅175x35	20pcs	₹ 1250.00	● ● ○
CLSRT18W	18W		90-300Vac, 50Hz	>0.90	∅ 228x35	10pcs	₹ 1400.00	● ● ○

CLSRT06W	06W	Square □	90-300Vac, 50Hz	>0.90	122x122x35	20pcs	₹ 520.00	● ● ○
CLSRT08W	08W		90-300Vac, 50Hz	>0.90	122x122x35	20pcs	₹ 700.00	● ● ○
CLSRT12W	12W		90-300Vac, 50Hz	>0.90	175x175x35	20pcs	₹ 830.00	● ● ○
CLSRT15W	15W		90-300Vac, 50Hz	>0.90	175x175x35	20pcs	₹ 1250.00	● ● ○
CLSRT18W	18W		90-300Vac, 50Hz	>0.90	228x228x35	10pcs	₹ 1400.00	● ● ○

# Crescent - Saturn

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



\*Housing Virgin Polycarbonate (Unbreakable), Long Lasting Unfade Colour.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSE03W	03W	90-300Vac, 50Hz	>0.90	∅ 68x14	50pcs	₹ 190.00	● ● ○
CLSE03W	03W	90-300Vac, 50Hz	>0.90	∅ 68x14	50pcs	₹ 200.00	● ● ●
CLCR06W	06W	90-300Vac, 50Hz	>0.90	∅116x48	20pcs	₹ 375.00	● ● ○
CLCR06W	06W	90-300Vac, 50Hz	>0.90	∅116x48	20pcs	₹ 395.00	● ● ●

## COB DOWNLIGHT SERIES

### Super Nova

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Housing aluminium die cast.
- Beam Angle 45°



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLD02022305W	07W	90-300Vac, 50Hz	>0.90	49.60	20pcs	₹ 875.00	● ● ○
CLD02022310W	12W	90-300Vac, 50Hz	>0.90	70.50	20pcs	₹ 1095.00	● ● ○
CLD02022315W	20W	90-300Vac, 50Hz	>0.90	85	20pcs	₹ 1665.00	● ● ○
CLD02022320W	30W	90-300Vac, 50Hz	>0.90	83.50	20pcs	₹ 2900.00	● ● ○

### Astro - Fixture

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Light Fixture cab be changed with out disturbing surface interior.
- Beam Angle 40°



MODEL	WATTAGE	DIMENSIONS Outer (mm)	Shape	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLMR09W	09W	∅99x115	○ Round	∅80mm	20pcs	₹ 1400.00	● ● ○
CLMR12W	12W	∅99x115		∅80mm	20pcs	₹ 1450.00	● ● ○
CLFXMR16L	-				20pcs	₹ 650.00	● ○

CLMR09W	09W	99x99x122	□ Square	86.5x86.5mm	20pcs	₹ 1400.00	● ● ○
CLMR12W	12W	99x99x122		86.5x86.5mm	20pcs	₹ 1450.00	● ● ○
CLFXMR16L	-				20pcs	₹ 650.00	● ○



# Aelius

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 40-50°



\*Housing Aluminium die cast.



MODEL	WATTAGE	POWER FACTOR	DIMENSION Outer (mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLZRD20087W	07W	>0.90	∅ 89x48	75mm	20pcs	₹ 950.00	● ● ○
CLZRD200812W	12W	>0.90	∅ 120x65	95mm	20pcs	₹ 1400.00	● ● ○
CLZRD200820W	20W	>0.90	∅ 148x82	120mm	20pcs	₹ 1960.00	● ● ○
CLZRD200835W	35W	>0.90	∅ 210x95	183mm	20pcs	₹ 3100.00	● ● ○
CLZRD200850W	50W	>0.90	∅ 230x120	190mm	20pcs	₹ 4020.00	● ● ○

# Premium

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 50°



\*Housing Aluminium die cast.



MODEL	WATTAGE	POWER FACTOR	DIMENSION Outer (mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL1D0202023W	03W	>0.90	∅ 45x35	∅ 36mm	20pcs	₹ 950.00	● ● ○
CL1D0202027W	07W	>0.90	∅ 65x42.5	∅ 54mm	20pcs	₹ 1400.00	● ● ○
CL1D02020212W	12W	>0.90	∅ 81x55	∅ 68mm	20pcs	₹ 1960.00	● ● ○

# Wingo

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Glare Free
- Beam Angle 50°



MODEL	WATTAGE	POWER FACTOR	DIMENSION Outer (mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL1D012021507W	07W	>0.90	∅ 60x59	∅ 50mm	20pcs	₹ 850.00	● ● ○
CL1D012021512W	12W	>0.90	∅ 82x72	∅ 70mm	20pcs	₹ 1200.00	● ● ○
CL1D012021507WCO	07W	>0.90	∅ 60x59	∅ 50mm	20pcs	₹ 1750.00	● ● ○
CL1D012021512WCO	12W	>0.90	∅ 82x72	∅ 70mm	20pcs	₹ 1900.00	● ● ○

# Fresco

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 60°



\*Housing Aluminium die cast and housing & heat sink for long life.

MODEL	WATTAGE	POWER FACTOR	DIMENSION Outer (mm)	DIMENSION Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLX312A07W	07W	>0.90	∅ 71.5x69	∅ 62mm	20pcs	₹ 1100.00	● ● ○
CLX312A12W	12W	>0.90	∅ 87x72	∅ 77mm	20pcs	₹ 1400.00	● ● ○

# Note: For dimmable Fulham/Osram/Philips driver.

# Nova

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Glare Free
- Beam Angle 60°



CRI > 80



System Lumen  
100-110Lm/W



Input  
90~300Vac



Surge Protection  
Upto 4KV

MODEL	WATTAGE	POWER FACTOR	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLNC05W	05W	>0.90	Ø 60x40	Ø 50mm	20pcs	₹ 650.00	● ● ○
CLNC07W	07W	>0.90	Ø 84x56	Ø 70mm	20pcs	₹ 900.00	● ● ○
CLNC09W	09W	>0.90	Ø 84x56	Ø 70mm	20pcs	₹ 1000.00	● ● ○
CLNC12W	12W	>0.90	Ø 105x72	Ø 90mm	20pcs	₹ 1350.00	● ● ○
CLNC15W	15W	>0.90	Ø 105x72	Ø 90mm	20pcs	₹ 1500.00	● ● ○
CLNC20W	20W	>0.90	Ø 124x92	Ø 110mm	20pcs	₹ 1800.00	● ● ○
CLNC30W	30W	>0.90	Ø 150x102	Ø 130mm	20pcs	₹ 2500.00	● ● ○
CLNC35W	35W	>0.90	Ø 150x102	Ø 130mm	20pcs	₹ 2700.00	● ● ○
CLNC50W	50W	>0.90	Ø 170x118	Ø 150mm	20pcs	₹ 3200.00	● ● ○

# Leon

- LEO is Deep recessed Cob downlight with reflector ring Branded led from Cree/Bridgelux/Citizen used
- Environment-friendly as it does not contain Mercury.
- The fitting have option of black and white frame.
- Three reflector options that is white, chrome & Black .
- It is a frame plus module system.
- Honeycomb and soft beam filters are available with the fitting.
- Glare Free
- Beam Angle 45°



CRI > 80



System Lumen  
100-110Lm/W



Input  
90~300Vac



Surge Protection  
Upto 4KV

MODEL	WATTAGE	POWER FACTOR	DIMENSIONS Outer (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLE07W	07W	>0.90	Ø 105x72	Ø 50mm	20pcs	₹ 4500.00	● ● ○
CLLE12W	12W	>0.90	Ø 84x56	Ø 70mm	20pcs	₹ 5700.00	● ● ○
CLLE24W	24W	>0.90	Ø 84x56	Ø 70mm	20pcs	₹ 8500.00	● ● ○

# Note: For dimmable Fulham/Osram/Philips driver.

## TRACK SERIES

### Aries

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Beam Angle 24°/38°/40°/60°



MODEL	WATTAGE	DIMENSIONS Outer (mm)	Shape	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT07COBH205/362	07W	150x90x70	Track	20pcs	₹ 850.00	● ● ○
CLT12COBH205/362	12W	150x100x70		20pcs	₹ 1200.00	● ● ○
CLT18COBH205/362	18W	180x135x90		20pcs	₹ 1750.00	● ● ○
CLT30COBH205/362	30W	175x130x80		20pcs	₹ 1900.00	● ● ○

CLTSL06W	06W	98x60x120	Surface	40pcs	₹ 1100.00	● ● ○
CLTSL010W	10W	160x60x130		40pcs	₹ 1500.00	● ● ○
CLTSL20W	20W	160x105x112		10pcs	₹ 2250.00	● ● ○
CLTSL30W	30W	255x107x112		10pcs	₹ 2800.00	● ● ○
CLTSL50W	50W	290x120x155		10pcs	₹ 4500.00	● ● ○

### Fressia



Magnetic track is a modular rail System for Surface mounting, recessed or suspended.

A varied range Top spots with adapters, can easily be clicked anywhere on the track to a brilliant magnetic System.

Magnetic track Lights are less disturbing, used in retail space, shop window, showrooms & homes.

The Light inserts can be easily plugged, Unplugged and positioned with in the track profile without any mechanical latching.

This ensured versatility of lighting arrangements as the mounting of each light inserts can be changes quickly

MODEL	WATTAGE	TYPE	DIMENSION Outer (mm)	BEAM ANGLE	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLMGT07W	07W	TRACK LIGHT	∅ 45X95	38°	₹ 4300.00	●
CLMGT07W	07W	HANGING SPOT	40x400 (WIRE-710)	38°	₹ 4700.00	●
CLMGT08W	08W	LINEAR LIGHT	20X305	120°	₹ 3000.00	●
CLMGT10W	10W	WALL WASHER	20X125	50°	₹ 5500.00	●
CLMGT12W	12W	LAZER BLADE LIGHT	20X250	50°	₹ 4000.00	●

## FLOOD LIGHT & CANOPY SERIES

### Diamond

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP66
- Best for long distance.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLFLD10WDIA	10W	120-300Vac, 50Hz	>0.90	115x110x35	20pcs	₹ 795.00	Yellow, White
CLFLD10WDIA	10W	120-300Vac, 50Hz	>0.90	115x110x35	20pcs	₹ 795.00	Red, Green, Blue
CLFLD20WDIA	20W	120-300Vac, 50Hz	>0.90	115x110x35	10pcs	₹ 1600.00	Yellow, White
CLFLD20WDIA	20W	120-300Vac, 50Hz	>0.90	115x110x35	10pcs	₹ 1700.00	Red, Green, Blue
CLFLD30WDIA	30W	120-300Vac, 50Hz	>0.90	115x145x35	10pcs	₹ 2030.00	Yellow, White
CLFLD30WDIA	30W	120-300Vac, 50Hz	>0.90	115x145x35	10pcs	₹ 2030.00	Red, Green, Blue
CLFLD50WDIA	50W	120-300Vac, 50Hz	>0.90	194x229x50	5pcs	₹ 3000.00	Yellow, White
CLFLD50WDIA	50W	120-300Vac, 50Hz	>0.90	194x229x50	5pcs	₹ 3000.00	Red, Green, Blue
CLFLD100WDIA	100W	120-300Vac, 50Hz	>0.90	270x282x60	5pcs	₹ 5400.00	Yellow, White
CLFLD150WDIA	150W	120-300Vac, 50Hz	>0.90	282x344x70	5pcs	₹ 13000.00	Red, Green, Blue
CLFLD200WDIA	200W	120-300Vac, 50Hz	>0.90	420x320x90	2pcs	₹ 15000.00	Yellow, White
CLFLD300WDIA	300W	120-300Vac, 50Hz	>0.90	285x300x142	1pc	₹ 22000.00	Red, Green, Blue

### Platinum

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP66
- Best for wide area coverage.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL30WFLP	30W	120-300Vac, 50Hz	>0.90	175x184x44	10pcs	₹ 2400.00	Yellow, White
CL50WFLP	50W	120-300Vac, 50Hz	>0.90	200x216x44	10pcs	₹ 2900.00	Yellow, White
CL100WFLP	100W	120-300Vac, 50Hz	>0.90	274x284x44	5pcs	₹ 5900.00	Yellow, White
CL200WFLP	200W	120-300Vac, 50Hz	>0.90		5pcs	₹ 11000.00	Yellow, White

## Ophelia

- Long life & photobiologically safe power LED Osram/Citizen/bridgelux.
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours
- IP66
- BEAM ANGLE 90°



\*Warranty on Demand., 2 years / 3years / 5 years



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLFD50WLEN	50W	120-300Vac, 50Hz	>0.90	185x143x102	5pcs	₹ 5400.00	● ● ○
CLFD100WLEN	100W	120-300Vac, 50Hz	>0.90	287x230x145	5pcs	₹ 11000.00	● ● ○
CLFD150WLEN	150W	120-300Vac, 50Hz	>0.90	280x228x159	2pcs	₹ 22000.00	● ● ○
CLFD200WLEN	200W	120-300Vac, 50Hz	>0.90	260x265x125	1pc	₹ 27000.00	● ● ○
CLFD300WLEN	300W	120-300Vac, 50Hz	>0.90	425x328x178	1pc	₹ 30000.00	● ● ○
CLFD400WLEN	400W	120-300Vac, 50Hz	>0.90	515x228x178	1pc	₹ 35000.00	● ● ○

\*on Demand BEAM ANGLE 40° & 60°

## Neo

- Compact & sleek design given elegant look.  
Heavy heat sink for better heat dissipation with 180° handle to fix.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL50WFLDN	50W	120-300Vac, 50Hz	>0.90	180x176x46	20pcs	₹ 2700.00	● ● ○

## Sinope

- Long life & photobiologically safe power LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



\*Warranty on Demand 2 years / 3years / 5 years



MODEL	WATTAGE	POWER FACTOR	BEAM ANGLE	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCFEL50W	50W	>0.90	120°	20pcs	₹ 10500.00	● ● ○
CLCFEL60W	60W	>0.90	120°	20pcs	₹ 12500.00	● ● ○
CLCFEL80W	80W	>0.90	120°	20pcs	₹ 14500.00	● ● ○

Sinope application is for Petrol pumps & Gas filling stations.

## STREET LIGHT SERIES

### Splendor Plus

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP66

\*Housing Heavy Aluminium die cast for longer life.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT50WSTN	50W	120-300Vac, 50Hz	>0.90	332x140x86	5pcs	₹ 6500.00	● ● ○
CLT70WSTN	70W	120-300Vac, 50Hz	>0.90	400x195x100	5pcs	₹ 7000.00	● ● ○
CLT90WSTN	90W	120-300Vac, 50Hz	>0.90	400x195x100	5pcs	₹ 7200.00	● ● ○
CLT100WSTN	100W	120-300Vac, 50Hz	>0.90	400x195x100	5pcs	₹ 7500.00	● ● ○
CLT120WSTN	120W	120-300Vac, 50Hz	>0.90	400x195x100	5pcs	₹ 8500.00	● ● ○
CLT150WSTN	150W	120-300Vac, 50Hz	>0.90	400x195x100	2pcs	₹ 10500.00	● ● ○

\*Warranty on Demand., 2 years / 3years / 5 years

### Splendor Security

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- Ip66



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT12W	12W	90-300Vac, 50Hz	>0.90	268x112x65	10pcs	₹ 1200.00	● ● ○
CLT18W	18W	90-300Vac, 50Hz	>0.90	268x112x65	10pcs	₹ 1600.00	● ● ○
CLTIN12W	12W	90-300Vac, 50Hz	>0.90	268x112x65	10pcs	₹ 2400.00	● ● ○
CLTIN18W	18W	90-300Vac, 50Hz	>0.90	268x112x65	10pcs	₹ 3500.00	● ● ○

### Rigel

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- Ip66



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLRSL20W	20W	120-300Vac, 50Hz	>0.90	282x120x47	10pcs	₹ 1550.00	● ● ○
CLRSL30W	30W	120-300Vac, 50Hz	>0.90	308x126x47	10pcs	₹ 2100.00	● ● ○
CLRSL50W	50W	120-300Vac, 50Hz	>0.90	405x144x54	5pcs	₹ 3200.00	● ● ○
CLRSL100W	100W	120-300Vac, 50Hz	>0.90	530x185x63	5pcs	₹ 5000.00	● ● ○

# Estrells



- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours
- Ip66



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLT24WSTN	24W	120-300Vac, 50Hz	>0.90	332x97x66	5pcs	₹ 2700.00	● ● ○
CLT30WSTN	30W	120-300Vac, 50Hz	>0.90	332x97x66	5pcs	₹ 3500.00	● ● ○
CLT40W	40W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 4500.00	● ● ○
CLT45W	45W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 4800.00	● ● ○
CLT50W	50W	120-300Vac, 50Hz	>0.90	372x150x72	5pcs	₹ 5000.00	● ● ○
CLT70W	70W	120-300Vac, 50Hz	>0.90	410x192x68	2pcs	₹ 6000.00	● ● ○
CLT90W	90W	120-300Vac, 50Hz	>0.90	410x192x68	5pcs	₹ 6500.00	● ● ○
CLT100W	100W	120-300Vac, 50Hz	>0.90	410x192x68	5pcs	₹ 6500.00	● ● ○

# Protia



- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours



\*Heavy Aluminium diecast for longer life.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL120STPRT	120W	120-300Vac, 50Hz	>0.90	462x231x80	5pcs	₹ 15000.00	● ● ○
CL150STPRT	150W	120-300Vac, 50Hz	>0.90	520x260x85	5pcs	₹ 25000.00	● ● ○
CL200STPRT	200W	120-300Vac, 50Hz	>0.90	520x260x85	5pcs	₹ 30000.00	● ● ○
CL250STPRT	250W	120-300Vac, 50Hz	>0.90	600x290x85	5pcs	₹ 35000.00	● ● ○

\*Warranty on Demand:, 2 years / 3years / 5 years



## HIGHBAY LIGHT SERIES

### Lexa

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- IP65



\*Lexa UFO High Bay replaces conventional MHL, CFL & HPS light and save energy more then 70-80% compare to conventional light.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CL50WUFO	50W	120-300Vac, 50Hz	>0.90	Ø352x175	1pc	₹ 5500.00	● ● ○
CL100WUFO	100W	120-300Vac, 50Hz	>0.90	Ø277x175	1pc	₹ 9000.00	● ● ○
CL150WUFO	150W	120-300Vac, 50Hz	>0.90	Ø318x190	1pc	₹ 12000.00	● ● ○
CL200WUFO	200W	120-300Vac, 50Hz	>0.90	Ø360x190	1pc	₹ 17000.00	● ● ○

### Beacon

- Long life & photobiologically power LED Osram/Citizen/bridgelux.
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 120- 300Vac
- Long life : 25000 hours
- IP40



\*Beacon, save 70-80% energy compared to metal halide sodium - High pressure conventional light.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLE100WHB	100W	120-300Vac, 50Hz	>0.90	Ø395x380	1pc	₹ 11000.00	● ● ○
CLE150WHB	150W	120-300Vac, 50Hz	>0.90	Ø450x420	1pc	₹ 15000.00	● ● ○
CLE200WHB	200W	120-300Vac, 50Hz	>0.90	Ø500x420	1pc	₹ 20000.00	● ● ○

### Neptune




Neptune is an Innovative Led well glass luminare for direct replacement of 100W conventional fixture. Neptune save up to 60% of Electricity without compromising. Lightning parameters in existing installation.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLWGL36	36W	120-300Vac, 50Hz	>0.90	4320lm	20pcs	₹ 3750.00	● ● ○
CLWGL50	50W	120-300Vac, 50Hz	>0.90	6000lm	20pcs	₹ 4000.00	● ● ○

## LINEAR SERIES

### Linear

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours

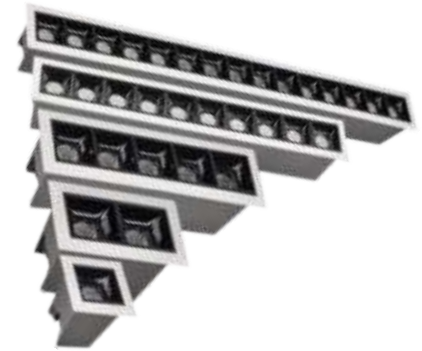

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLMG001	03W	90-300Vac, 50Hz	>0.90	74x56x56	20pcs	₹ 5500.00	● ● ○
CLMG003	09W	90-300Vac, 50Hz	>0.90	132x56x56	20pcs	₹ 9000.00	● ● ○
CLMG005	15W	120-300Vac, 50Hz	>0.90	207x56x56	20pcs	₹ 12000.00	● ● ○
CLMG010	25W	120-300Vac, 50Hz	>0.90	397x56x56	20pcs	₹ 17000.00	● ● ○

### Linus


- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Profile can be customise



\*Housing Aluminium diecast & Virgin Polycarbonate diffuser for better Distribution of light.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLS36W	36W	90-300Vac, 50Hz	>0.90	1185x53x80	1pc	₹ 6500.00	● ● ○
CLLR36W	36W	90-300Vac, 50Hz	>0.90	1185x53x80	1pc	₹ 6500.00	● ● ○

### Hexa - Nurmo

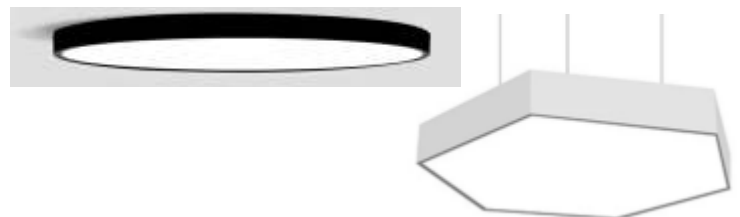


MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLHX40W	40W	90-300Vac, 50Hz	>0.90	672x582x60	20pcs	₹ 17000.00	● ● ○
CLNMR30W	30W	90-300Vac, 50Hz	>0.90	609x307x60	20pcs	₹ 15000.00	● ● ○

## ROPE & STRIP LIGHT SERIES

### Glitter

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- LED 2835-120LED/mtr
- IP65

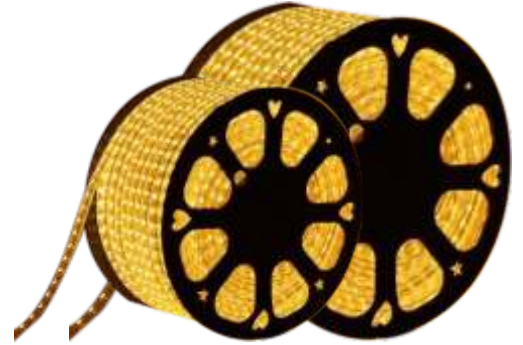


\*Clair Glitter ropes are made using SMD Led Strips and are encased inside of a protective PVC Casing. The design and housing allow for easy shaping & bending of lights.

MODEL	WATTAGE ( PER MTR)	VOLTAGE	POWER FACTOR	STANDARD KPT/MTR	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLSTD220V-2835WH	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835WW	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835NW	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835RD	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835AMB	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835GR	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835OCB	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835PK	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
CLSTD220V-2835BL	10W / mtr	120-300Vac, 50Hz	>0.90	50mtr x 3 per box	₹ 198.00/mtr	● ● ●
Connector	----	120-300Vac, 50Hz	>0.90		₹ 125.00	

\* 100 Meter Lenth on demand

### Sparkle

- Beam Angle: 120°
- Mounting Adhesive
- Dimmable : Yes
- Environmental : Indoor/Dry Location
- Strip LED 2835

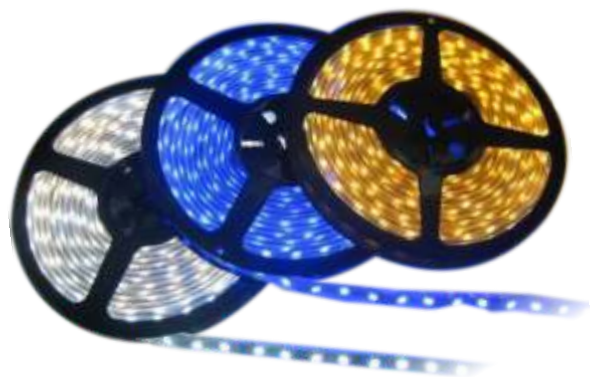

\*Flexible LED strip light made of bright LED chip high quality thermal PCB board and an unmatched quality process. IP20 Product

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLST12VB60L	20W/Roll	120-300Vac, 50Hz	>0.90	2000lm	50 Roll / Box	₹ 1050.00	● ● ●
CLST12VB120L	35W/Roll	120-300Vac, 50Hz	>0.90	3500lm	50 Roll / Box	₹ 1850.00	● ● ●
CLST12VB180L	54W/Roll	120-300Vac, 50Hz	>0.90	5400lm	50 Roll / Box	₹ 2250.00	● ● ●
CLST12VB240L	75W/Roll	120-300Vac, 50Hz	>0.90	7500lm	50 Roll / Box	₹ 3250.00	● ● ●

# Colour are available Red / Blue / Green / Ocean Blue / Amber / Pink. IP65 will available on demand

## DRIVER SERIES

### Sparkle

- Aluminium body housing
- Constant current output
- Working on 90 voltage to 300 voltage
- Output voltage : 12V for 5 meter led strips



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	AMPERE	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLSMPS2	24W	120-300Vac, 50Hz	>0.90	2A	20pcs	₹ 700.00
CLSMPS3	36W	120-300Vac, 50Hz	>0.90	3A	20pcs	₹ 900.00
CLSMPS5	60W	120-300Vac, 50Hz	>0.90	5A	20pcs	₹ 1300.00
CLSMPS8	100W	120-300Vac, 50Hz	>0.90	8A	20pcs	₹ 1600.00
CLSMPS10	120W	120-300Vac, 50Hz	>0.90	10A	20pcs	₹ 1900.00

### Sparkle



MODEL	WATTAGE	TYPE	VOLTAGE	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)
CLCCPS03W	03W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 200.00
CLCCPS06W	06W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS09W	09W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS12W	12W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 250.00
CLCCPS15W	15W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 300.00
CLCCPS20W	18-20W	PC - Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 350.00
CLCCPS30WAL	30W	AL-PT-Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS40WAL	40W	AL-PT-Cabinet	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS24WST	24W	Street Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 400.00
CLCCPS30WST	30W	Street Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 450.00
CLCCPS45WST	45W	Street Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 500.00
CLCCPS50WST	50W	Street Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 550.00
CLCCPS30WFL	30W	Flood Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 450.00
CLCCPS50WFL	50W	Flood Light	120-300Vac, 50Hz	>0.90	20pcs	₹ 500.00

Constant Current Driver Suitable for - Downlights, COB Light, Flood Light, Street Light, Highbay Light.

## SURFACE & SUSPENDED SERIES

### C-Lite



The decorative luminaire suitable for LED bulbs available in different colour options. Designer product suitable for various interior intent size option offers flexibility with respect to product application. Neat design with minimalistic approach.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLDC09W	09W	120-300Vac, 50Hz	>0.90	Ø 305x185	1pc	₹ 3400.00	● ● ○
CLDC12W	12W	120-300Vac, 50Hz	>0.90	Ø 373x205	1pc	₹ 3700.00	● ● ○
CLDC15W	15W	120-300Vac, 50Hz	>0.90	Ø 425x210	1pc	₹ 3900.00	● ● ○
CLDC20W	20W	120-300Vac, 50Hz	>0.90	Ø 600x320	1pc	₹ 4200.00	● ● ○

### Hexa



The decorative luminaire suitable for LED bulbs available in different colour options. Inspired by water droplet, fixture has fluid design intent. Softness in design makes it suitable for almost any interior fit out.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLZET09W	09W	120-300Vac, 50Hz	>0.90	Ø 257x210	1pc	₹ 3550.00	● ● ○
CLZET12W	12W	120-300Vac, 50Hz	>0.90	Ø 368x280	1pc	₹ 3800.00	● ● ○
CLZET15W	15W	120-300Vac, 50Hz	>0.90	Ø 420x280	1pc	₹ 3900.00	● ● ○


### Bitá



The decorative luminaire suitable for LED bulbs available in different color options. Compact and cute design which can be used in a cluster. Simple and yet elegant, Mole can be used on various breakout areas of both residential and commercial fit outs.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLMOL09W	09W	120-300Vac, 50Hz	>0.90	Ø 205x175	1pc	₹ 3500.00	● ● ○
CLMOL12W	12W	120-300Vac, 50Hz	>0.90	Ø 205x175	1pc	₹ 3700.00	● ● ○
CLMOL15W	15W	120-300Vac, 50Hz	>0.90	Ø 205x175	1pc	₹ 3900.00	● ● ○


# Lotus Cylindrical



Lotus cylindrical surface mounted COB downlight with extruded aluminium housing & die casted heat sink.  
It has high power COB & reflector for better light distribution suitable for retail hospitality & residential application area.

MODEL	WATTAGE	VOLTAGE	TYPE	DIMENSION Ø/H(mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCSS10W	10W	120-300Vac, 50Hz	SUSPENDED	Ø150x58	>0.90	20pcs	₹ 300.00	● ● ○
CLCSS20W	20W	120-300Vac, 50Hz		Ø150x75	>0.90	20pcs	₹ 460.00	● ● ○
CLCSS30W	30W	120-300Vac, 50Hz		Ø150x100	>0.90	20pcs	₹ 650.00	● ● ○
CLCSS40W	40W	120-300Vac, 50Hz		Ø148x120	>0.90	20pcs	₹ 680.00	● ● ○
CLCSR10W	10W	120-300Vac, 50Hz	SURFACE	Ø150x58	>0.90	10pcs	₹ 1600.00	● ● ○
CLCSR20W	20W	120-300Vac, 50Hz		Ø150x75	>0.90	10pcs	₹ 2100.00	● ● ○
CLCSR30W	30W	120-300Vac, 50Hz		Ø150x100	>0.90	10pcs	₹ 3000.00	● ● ○
CLCSR40W	40W	120-300Vac, 50Hz		Ø148x120	>0.90	10pcs	₹ 3500.00	● ● ○

# Turbo




Turbo cylindrical surface mounted COB downlight with extruded aluminium housing & die casted heat sink.  
It has high power COB & reflector for better light distribution suitable for retail hospitality & residential application area.

MODEL	WATTAGE	VOLTAGE	TYPE	DIMENSION Ø/H(mm)	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLTUR08WSDBH	08W	120-300Vac, 50Hz	SUSPENDED	Ø63X185	>0.90	20pcs	₹ 1950.00	● ● ○
CLTUR12WSDBH	12W	120-300Vac, 50Hz		Ø88X200	>0.90	20pcs	₹ 2450.00	● ● ○
CLTUR18WSDBH	18W	120-300Vac, 50Hz		Ø63X185	>0.90	20pcs	₹ 3000.00	● ● ○
CLTUR08WSFBH	08W	120-300Vac, 50Hz	SURFACE	Ø63X185	>0.90	20pcs	₹ 1900.00	● ● ○
CLTUR12WSFBH	12W	120-300Vac, 50Hz		Ø88X200	>0.90	20pcs	₹ 2400.00	● ● ○
CLTUR18WSFBH	18W	120-300Vac, 50Hz		Ø63X185	>0.90	20pcs	₹ 2950.00	● ● ○

## INDUSTRIAL & OUTDOOR SERIES

### Crux




IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCRBD09W	09W	90-300Vac, 50Hz	>0.90	594x70x25	₹ 8200.00	● ● ○




### Allur




IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLARBD10W	10W	90-300Vac, 50Hz	>0.90	Ø122x600	₹ 6500.00	● ● ○

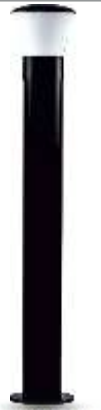


### Lynx




IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLY10W	10W	90-300Vac, 50Hz	>0.90	Ø 175x600	₹ 7500.00	● ● ○

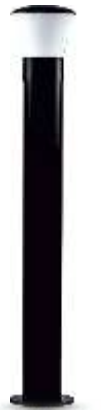

### Vela



IP 65 LED bollard is suitable for landscape stabilized lighting applications Luminaire is made of high grade corrugon resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLVLBD15W	15W	90-300Vac, 50Hz	>0.90	Ø218x600	₹ 11000.00	● ● ○



# Canis



- CRI > 80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCAN01W	01W	90-300Vac, 50Hz	>0.90	Ø49x90.5	Ø45.8	10pcs	₹ 4000.00	

# Taurus



- CRI > 80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLTAU03W	03W	90-300Vac, 50Hz	>0.90	Ø83.8x129.4	Ø77.8	5pcs	₹ 5800.00	
CLTAU09W	09W	90-300Vac, 50Hz	>0.90	Ø83.8x129.4	Ø77.8	5pcs	₹ 7900.00	
CLTAU12W	12W	90-300Vac, 50Hz	>0.90	Ø125.5x129.5	Ø118	5pcs	₹ 10800.00	
CLTAU15W	15W	90-300Vac, 50Hz	>0.90	Ø154.8x152	Ø148.5	5pcs	₹ 12700.00	
CLTAU18W	18W	90-300Vac, 50Hz	>0.90	Ø154.8x152	Ø148.5	5pcs	₹ 14500.00	

# Gimy



- CRI > 80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

Post top fixture for pole mounted application Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof milky diffuser, IP65 protection suitable for outdoor application.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	DIMENSIONS Cutout (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLJMY30W	30W	120-300Vac, 50Hz	>0.90	Ø575x370	Ø77.5	1pc	₹ 18500.00	
CLJMY60W	60W	120-300Vac, 50Hz	>0.90	Ø575x370	Ø77.5	1pc	₹ 27000.00	



# Orio



- CRI>80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

Post top fixture for pole mounted application. Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof milky. IP65 protection suitable for outdoor application.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLOR45W	45W	120-300Vac, 50Hz	>0.90	Ø 450x520	76.5	₹ 9800.00	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>

# Alya



- CRI>80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

Post top fixture for pole mounted application. Aluminium housing with corrosion resistant powder coat and UV stabilized vandal proof clear diffuser, IP65 protection suitable for outdoor application.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLAL30W	30W	120-300Vac, 50Hz	>0.90	Ø 370x450	76.5	₹ 8000.00	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>

# Leo



- CRI>80
- System Lumen 100-110Lm/W
- Surge Protection Upto 4KV

Post top fixture for pole mounted application Aluminium housing with corrosion resistant powder coat and UV Stabilized Injection moulded Poly Carbonate with Prismatic Cut. IP66 protection suitable for outdoor application.

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLLE25W	25W	120-300Vac, 50Hz	>0.90	Ø 332x475	70	₹ 10500.00	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>

## Cetus



CRI &gt; 80

System Lumen  
100-110Lm/WSurge Protection  
Upto 4KV

IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof clear PC diffuser.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCET45W	45W	120-300Vac, 50Hz	>0.90	Ø 450x680	69	₹ 20500.00	<span style="color: yellow;">●</span> <span style="color: white;">●</span> <span style="color: white;">○</span>

## Atik



CRI &gt; 80

System Lumen  
100-110Lm/WSurge Protection  
Upto 4KV

IP 65 Lamp Post is suitable for outdoor lighting applications Luminaire is made in die-cast aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	POLE DIA (mm)	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLATI45W	45W	120-300Vac, 50Hz	>0.90	315x315x690	78	₹ 25000.00	<span style="color: yellow;">●</span> <span style="color: white;">●</span> <span style="color: white;">○</span>

## Iglow



CRI &gt; 80

System Lumen  
100-110Lm/WSurge Protection  
Upto 4KV

IP 65 Lamp Post is suitable for outdoor lighting applications Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof clear PC diffuser.



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Ø   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLIG50W	50W	120-300Vac, 50Hz	>0.90	Ø 625x650	1pc	₹ 20000.00	<span style="color: yellow;">●</span> <span style="color: white;">●</span> <span style="color: white;">○</span>

## Eros

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- PC Body for long durability.
- Ip65



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLNT10WBH	10W	90-300Vac, 50Hz	>0.90	172x73x46	20pcs	₹ 650.00	● ● ○
CLNT20WBH	20W	90-300Vac, 50Hz	>0.90	212x103x60	20pcs	₹ 850.00	● ● ○

## Rean

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours
- Ip65



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION L   W   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCLCK1L	05W	90-300Vac, 50Hz	>0.90	81x78x54	10pcs	₹ 1100.00	● ● ○
CLCLCK2L	10W	90-300Vac, 50Hz	>0.90	147x78x54	10pcs	₹ 1200.00	● ● ○

## Exter

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Long life : 25000 hours
- Ip65



MODEL	WATTAGE	VOLTAGE	POWER FACTOR	DIMENSION Dia   H (mm)	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLCSPL05	05W	90-300Vac, 50Hz	>0.90	72x265	10pcs	₹ 1400.00	● ● ○
CLCSPL07	07W	90-300Vac, 50Hz	>0.90	72x265	10pcs	₹ 2500.00	● ● ○
CLCSPL09	09W	90-300Vac, 50Hz	>0.90	80x280	10pcs	₹ 2500.00	● ● ○
CLCSPL12	12W	90-300Vac, 50Hz	>0.90	80x280	10pcs	₹ 2500.00	● ● ○
CLCSPL15	15W	90-300Vac, 50Hz	>0.90	80x280	10pcs	₹ 2500.00	● ● ○
CLCSPL20	20W	90-300Vac, 50Hz	>0.90	80x280	10pcs	₹ 2500.00	● ● ○

# Aven

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



CRI>80



System Lumen  
100-110Lm/W



Surge Protection  
Upto 4KV

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	LUMEN	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLFTL05	05W	90-300Vac, 50Hz	>0.90	500lm	10pcs	₹ 900.00	● ● ○

# Auris

- Long life & photobiologically safe LEDs
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury.
- Instant light with low running temperatures
- Operating temperature: -10° C to +45° C
- Operating voltage range: 90- 300Vac
- Long life : 25000 hours



CRI>80



System Lumen  
100-110Lm/W



Input  
90~300Vac




Surge Protection  
Upto 4KV

MODEL	WATTAGE	VOLTAGE	POWER FACTOR	STANDARD PACKING	LIST PRICE (₹ Per Unit)	COLOUR TEMPERATURE
CLWYL02	06W 2 Way Light (03W + 3W)	90-300Vac, 50Hz	>0.90	10pcs	₹ 950.00	● ● ○
CLWYL04	12W 4 Way Light (3W x 4)	90-300Vac, 50Hz	>0.90	10pcs	₹ 1250.00	● ● ● ○
CLWYL06	18W 6 Way Light (6W x 3)	90-300Vac, 50Hz	>0.90	10pcs	₹ 1800.00	● ● ● ● ○
CLWYL04R	12W 4 Way Light (3W x 4) Round	90-300Vac, 50Hz	>0.90	10pcs	₹ 1600.00	● ● ● ○



- Power Grid Corporation Of India Limited
- Indian Railway
- Steel authority of India limited
- Bharat Petroleum Corporation Limited
- BARC
- Bharat Earth Movers Limited (BEML)
- Rashtriya Ispat Nigam Ltd
- Doordarshan Kendra
- Bharat Heavy Electricals Limited (BHEL)
- Coalfields Limited
- Indian Council of Agricultural Research (ICAR)
- Ministry of Chemicals and Fertilizers
- Cantonment Board Dehradun
- MES
- PWD
- Department of School Education and Literacy
- CBSE (Central Board of Secondary Education)
- ESIC (Employee State Insurance Corporation)
- Rubber Board India
- BIRSA Agriculture University
- Deputy Collector Office
- MKCG Medical College
- Water Resources Department
- ITDA
- R & B Department Odisha
- Paradip Port Trust
- NALCO
- SIDDHA Group
- Indian Oil Petrol Pump
- Sterling Hospital
- P S Group
- Srijan Industrial Logistics Park
- DLF Group
- Bhubaneswar Municipal Corporation
- Max Fort School
- Gram Panchayat, Raidighi, West Bengal
- Howrah Municipal Porporation
- Haldiram Food, Nagpur Maharashtra
- Logistics Park, Nagpur Maharashtra
- Orient Cement, Jalgaon Maharashtra
- West Bengal Electronics Industry Development Corporation Limited (WEBEL)

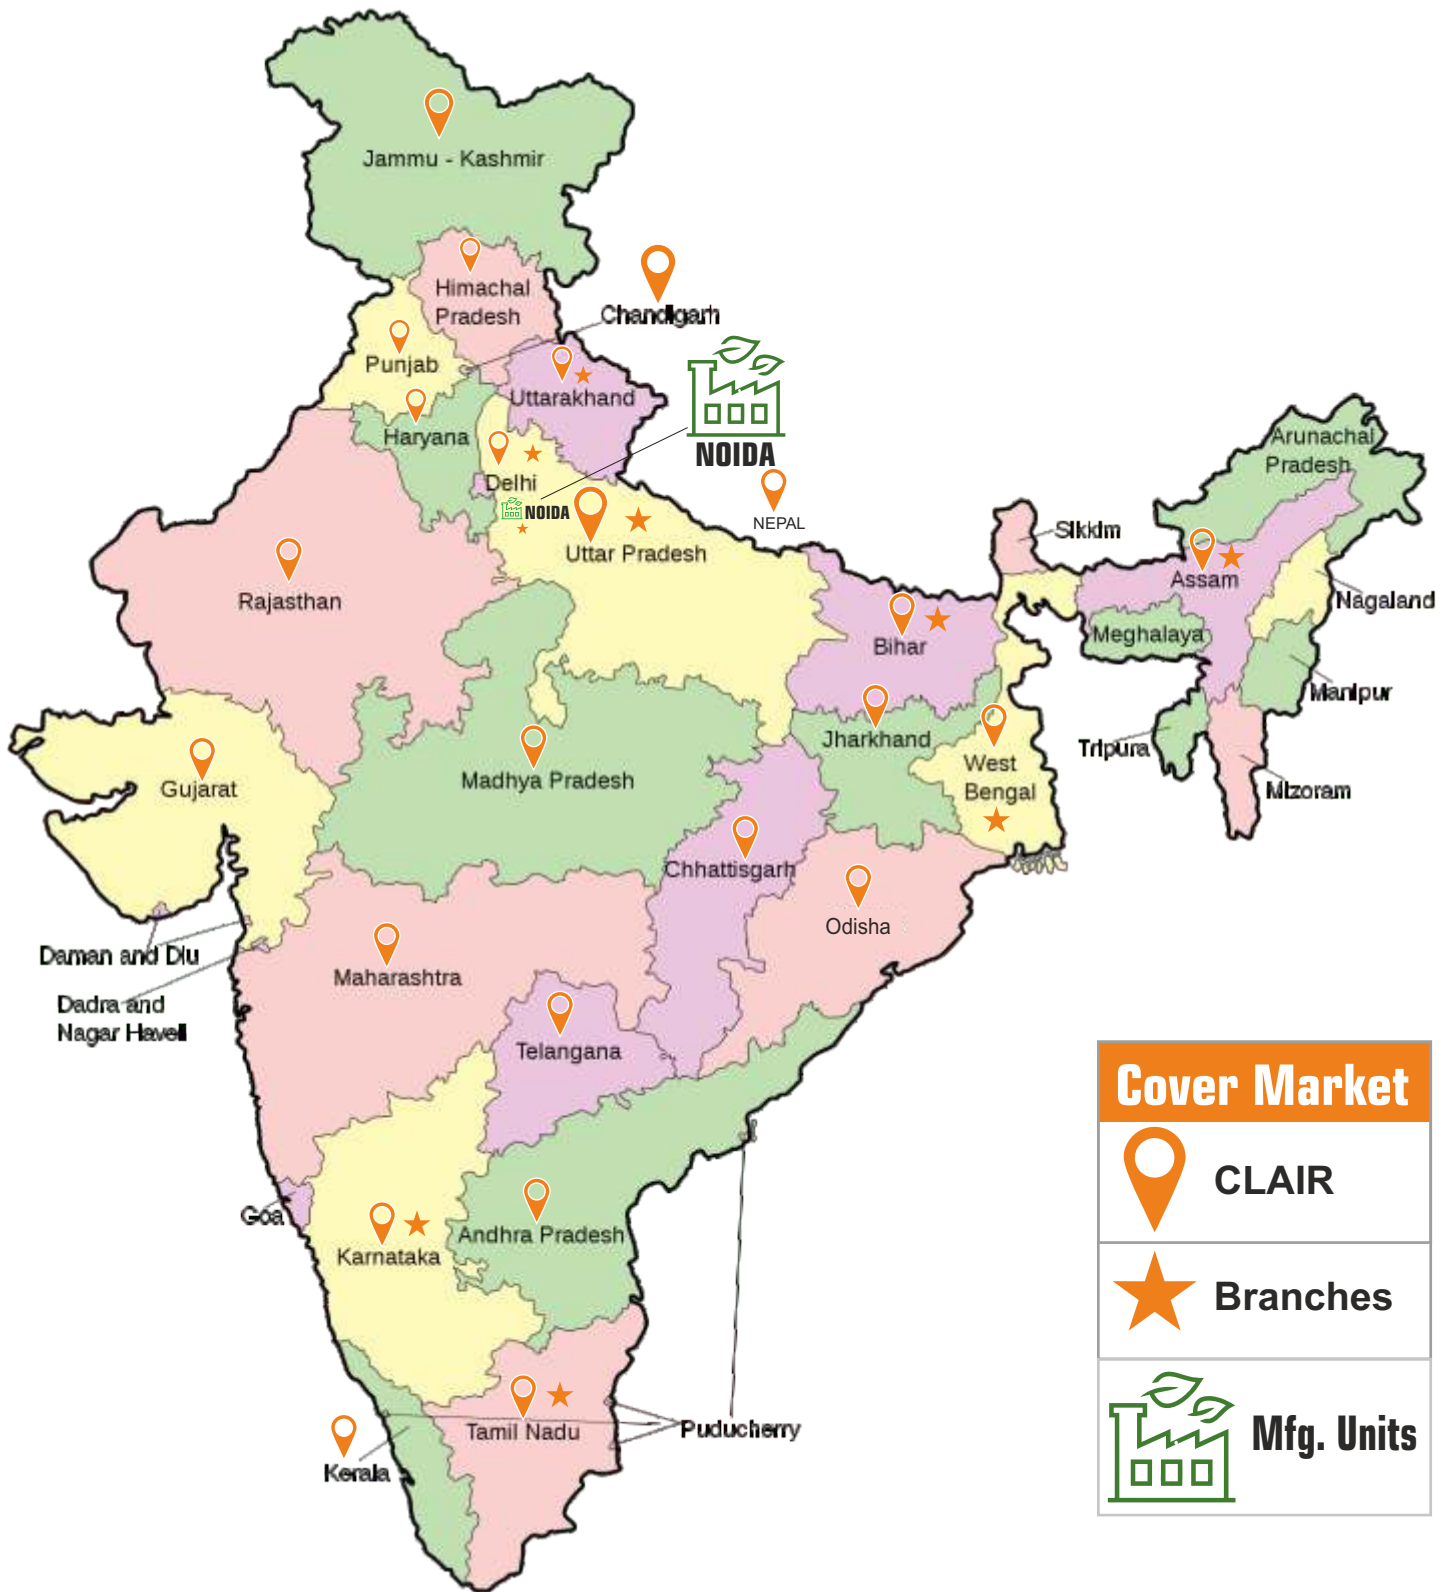

#### Terms & Conditions

- Prices are inclusive of GST.
- Prices are subject to change without prior notice.
- Material Damage in transportation are not cover in guarantee.
- Company will not responsible for material stolen/seized due to any illegal act.
- Photo shown in the price list may differ due to change in design and technology.
- Warranty/Guarantee applicable as per CLAIR Warranty Policy.
- All efforts have been made to insure accuracy in completion of technical/commercial details but may change due to change in design and specification.
- This price list supersede all previous Price List.
- Any disputes are subjected to Delhi jurisdiction only.



Clair Electronics Pvt. Ltd.

**Branch Office:**

**Tamilnadu:** No. 11/2, Shyam Avenue, College Road, Nungambakkam, Chennai - 600006 (Tamilnadu)  
# 93154-01628

**Karnataka:** 1st Floor, No-854, Anna Poorna Complex, PP Industrial Area, Deepanjali Nagar,  
Mysore Road, Bengaluru (Bangalore) Urban, Karnataka, 560026  
# 93154-01507

**West Bengal:** Krishna Building, 224-A, Suit No 315, 3rd Floor, Acharya Jagdish Chandra Bose Road,  
Kolkata West Bengal - 700 017  
# 93154-01503

**Uttar Pradesh:** E143, Phase 1, Transport Nagar, Kanpur Road, Lucknow, Uttar Pradesh - 226012  
# 93154-01542

**Bihar:** Opp. Maa Shitla Escort Tractor Agencies, Badi Pahari, Gaya-Masauri Main Road,  
Patna, Bihar - 800007  
# 93154-01598

**Uttarakhand:** 88/1, Tagore Villa, Chakrata Road, Nari Shilp Mandir, Dehradun, Uttarakhand, 248001  
# 93154-01638

**Assam:** House No. 61, PS Bharalumukh, IIU Parthak, Bishnupur Main Road, Kamrup, Guwahati,  
Assam - 781016  
# 93154-01591

**Factory:**

Plot No-58, Sector-155, Noida Uttar Pradesh - 201310  
# 93154-01548, 0120-718-5859

Feedback & Suggestion :

Customer Care Manager

✉ support@clairjg.com

☎ +91 011-26914941, 9315401565

Website : [www.clairjg.com](http://www.clairjg.com)

